

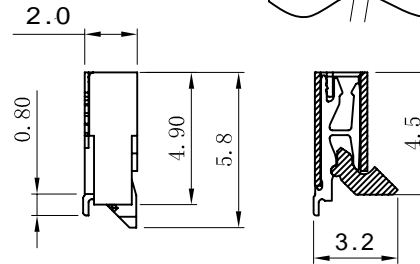
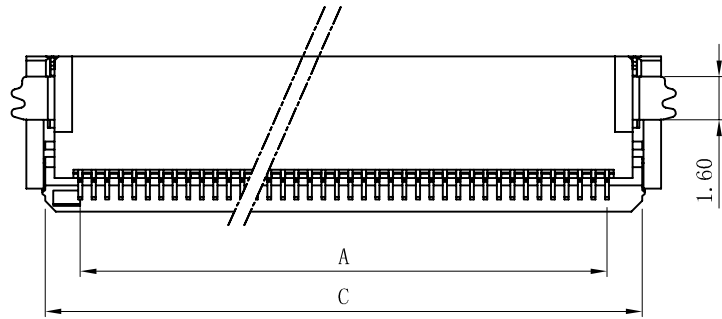



PITCH 0.5mm FPC CONNECTOR SMT TYPE

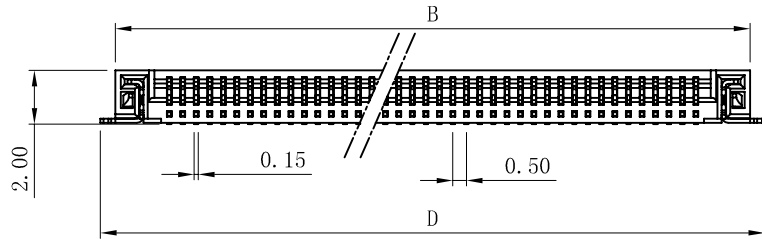

孔位	A	B	C	D
10	4.50	8.50	7.10	9
12	5.50	9.50	8.10	10
14	6.50	10.50	9.10	11
18	8.50	12.50	11.10	13
20	9.50	13.50	12.10	14
22	10.50	14.50	13.10	15
24	11.50	15.50	14.10	16
26	12.50	16.50	15.10	17
30	14.50	18.50	17.10	19
32	15.50	19.50	18.10	20
33	16.00	20.00	18.60	20.5
34	16.50	20.50	19.10	21
35	17.00	21.00	19.60	21.5
36	17.50	21.50	20.10	22
38	18.50	22.50	21.10	23
40	19.50	23.50	22.10	24
42	20.50	24.50	23.10	25
45	22.00	26.00	24.60	26.5
50	24.50	28.50	27.10	29
55	27.00	31.00	29.60	31.5
60	29.50	33.50	32.10	34

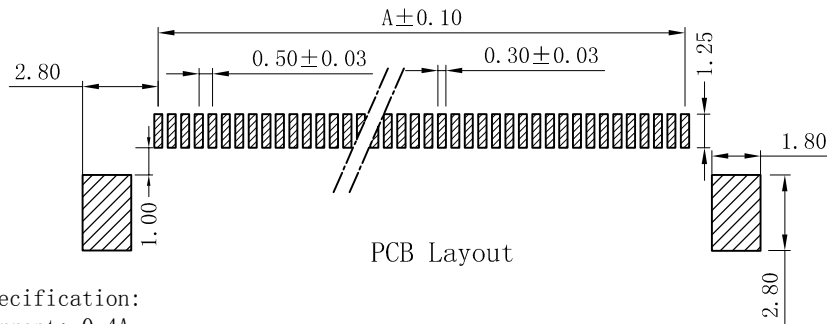

FPC 05 20 01-xx H T
 T: Tin OVER Nickel
 Back-Flip
 PIN:10-60
 01: Clamshell FPC T=0.3mm
 2.0mm High
 0.5mm Pitch
 FPC Connector

specification:
 Current: 0.4A
 Voltage: 50V
 Withstand voltage: 200V
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $500M\Omega$
 Temperature: $-20^{\circ}C \sim +85^{\circ}C$
 Plastic: LCP, UL94V-0
 Lock catch: LCP
 Shell splinter: Phosphor bronze gold plating

X. ± 0.3	X° $\pm 5^{\circ}$	UNITS mm	NAME (INTENDED USE)
.X ± 0.25	.X° $\pm 2^{\circ}$	MAT'L	PART NO. (INTENDED USE)
.XX ± 0.20	.XX° $\pm 1^{\circ}$	FINISH	FPC052001-xxHT
.XXX ± 0.10	.XXX° $\pm 0.5^{\circ}$	Q'TY	APPD:
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY			CHKD:
			DR: YLZ 2012.05.10

深圳市联泽瑞科技有限公司
 SHENZHEN LIANZERUI TECHNOLOGY CO.,LTD.

FPC 0.5间距前插后压

SCALE	SHEET	REV.
1/1	1/1	A