


Electrical Characteristics:
 Current rating: 0.5A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 800M\Omega$


Material Description:

Contact: Phosphor Bronze Tin-plated
 Solder Tab: Phosphor Bronze Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

FPC 10 25 02-xx U T

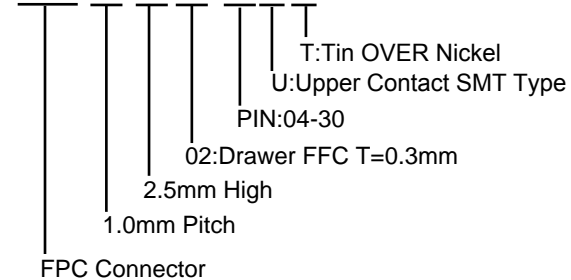

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.1	29.00	37.0	31.10
29P	34.1	28.00	36.0	30.10
28P	33.1	27.00	35.0	29.10
27P	32.1	26.00	34.0	28.10
26P	31.1	25.00	33.0	27.10
25P	30.1	24.00	32.0	26.10
24P	29.1	23.00	31.0	25.10
23P	28.1	22.00	30.0	24.10
22P	27.1	21.00	29.0	23.10
21P	26.1	20.00	28.0	22.10
20P	25.1	19.00	27.0	21.10
19P	24.1	18.00	26.0	20.10
18P	23.1	17.00	25.0	19.10
17P	22.1	16.00	24.0	18.10
16P	21.1	15.00	23.0	17.10
15P	20.1	14.00	22.0	16.10
14P	19.1	13.00	21.0	15.10
13P	18.1	12.00	20.0	14.10
12P	17.1	11.00	19.0	13.10
11P	16.1	10.00	18.0	12.10
10P	15.1	9.00	17.0	11.10
9P	14.1	8.00	16.0	10.10
8P	13.1	7.00	15.0	9.10
7P	12.1	6.00	14.0	8.10
6P	11.1	5.00	13.0	7.10
5P	10.1	4.00	12.0	6.10
4P	9.1	3.00	11.0	5.10



上接触

SER	AREA	REVISIONS	CHK	DATE

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 X.X ±0.20
 X.XX ±0.10
 X.XXX ±0.05
 ANG. ±0°30'

深圳市联泽瑞科技有限公司
 SHENZHEN LIANZERUI TECHNOLOGY CO.,LTD.

APPROVED	DATE	PART NO	FPC102502-xxUT
CHECKED	DATE	DRAWING NO	
DRAWN	DATE	COMPUTER NO	
NUMBER	SCALE	SIZE	NAME
	8:1	A3	FPC 1.0 一代上接成品图
			REV
			A